

spacecannon SNe

REV.02/2019



BRAVO  
yes, we light!



**BRAVO**  
POWERFUL MONOCROMATIC  
LED BAR FOR INDOOR  
APPLICATIONS


MADE IN ITALY





# BRAVO 35W/m W

IP40   

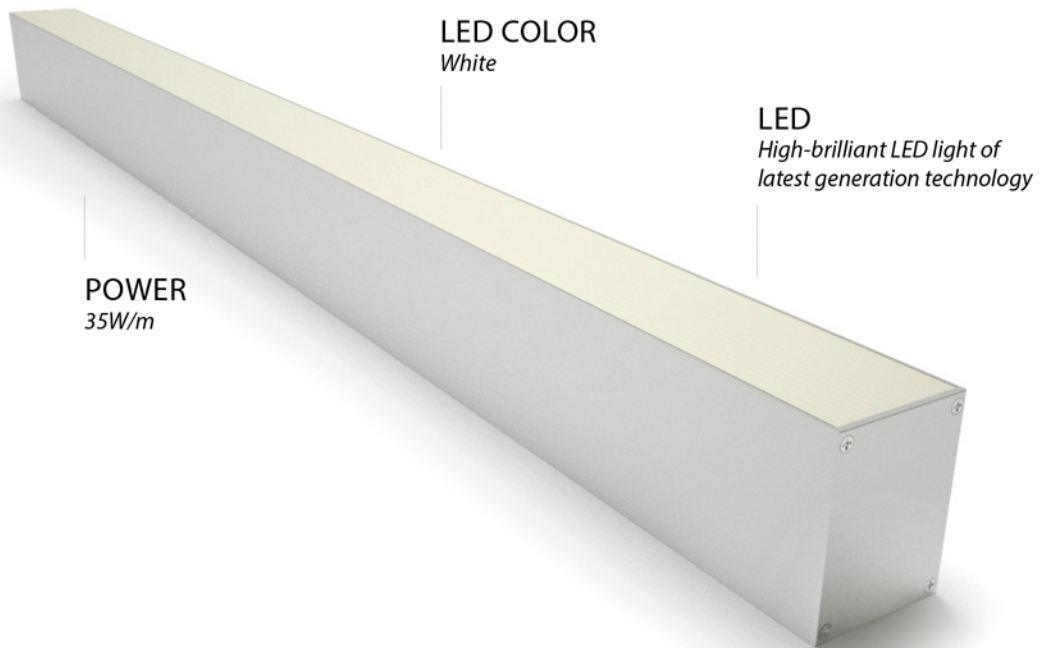

BRAVO is a WHITE led bar for indoor applications. The housing made of anodized aluminum alloy hosts a powerful LED module that is hidden by a de-glaring lens: the result is a continuous line of powerful light. BRAVO is available in different lengths (from 1 m up to 3m) with integrated electronic for the dimming functions.

BRAVO WHT can be "plug and play" or dimmable thanks to DMX512 protocol. It can be recessed in the ceiling, vertically in the wall or hung with steel threads.

It is possible to choose among fixed color temperatures (2200K, 3000K, 4000K) or dynamic white with an amazing luminous flux of 6000lm/m @ 4000K.

## TECHNICAL SPECIFICATION

	<b>BRAVO Easy</b>	<b>BRAVO Dynamic</b>
<b>REFERRING STANDARDS</b>	IEC 60598-1 / IEC 60598-2-5 / IEC 62471	IEC 60598-1 / IEC 60598-2-5 / IEC 62471
<b>NOMINAL CURRENT TO THE LEDS</b>	100 mA	100 mA
<b>POWER AT SOURCE</b>	35 W/m	35 W/m
<b>NOMINAL INPUT VOLTAGE</b>	220 - 240 V AC	220 - 240 V AC
<b>LIGHT INTENSITY REGULATION</b>	-	0%-100% With DMX512
<b>BEAM ANGLES</b>	120°	120°
<b>MOUNTING POSITIONS</b>	Recessed / Hung	Recessed / Hung
<b>INITIAL LUMEN OUTPUT 4000K</b>	> 6000 lm / m	> 6000 lm / m
<b>COLOR TEMPERATURE (*)</b>	2200K / 3000K / 4000K	2200K / 4000K
<b>CRI</b>	80 - 90	80 - 90
<b>LM OUTPUT LIFETIME</b>	> 50000 h	> 50000 h
<b>OPERATING TEMPERATURE</b>	-30°C / +40°C	-30°C / +40°C
<b>IP RATING</b>	IP40	IP40
<b>WEIGHT</b>	1,8 Kg/m	1,8 Kg/m
<b>STANDARD LENGTH OF THE WIRE</b>	2 m	2 m
<b>FRONT COVER</b>	Milky white	Milky white

(\*) Other color temperatures are available on request

## TECHNICAL FEATURES

- High light output
- Available in different lengths
- Integrated DMX control (integrated power supply)
- Metal parts in silver anodized aluminum
- High-brilliant LED light of latest generation technology
- Addressable with RDM (Only Dynamic)
- Deglaring cover with milky white finish
- Dynamic white from 2200K up to 4000K
- High CRI

## DIMENSIONS


mm (inch)



RECESSED [L]	509 (20) *	970 (38)	1431 (56.3)	1903 (75)	2364 (93)	2825 (111)
HUNG [L]	470 (18.5) *	930 (36.6)	1400 (55.1)	1855 (73)	2325 (91.5)	2775 (109.2)

(\*) Only for Bravo easy

## PHOTOMETRIC DATA

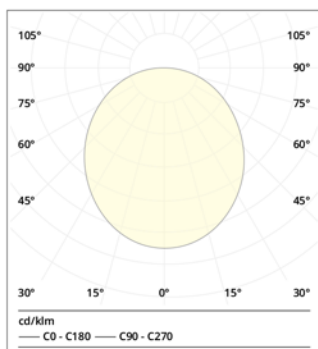

120°

via Giuseppe Parini, 1  
23845 Costa Masnaga (LC) Italy  
Tel +39 0314121731  
Fax +39 0314131783

info@spacecannonsne.it  
**spacecannonsne.it**

