


spacecannon SNe

REV.02/2019



NOVA
yes, we light!

NOVA INDOOR
BRIGHT LINEAR FIXTURE
FOR INDOOR LIGHTING

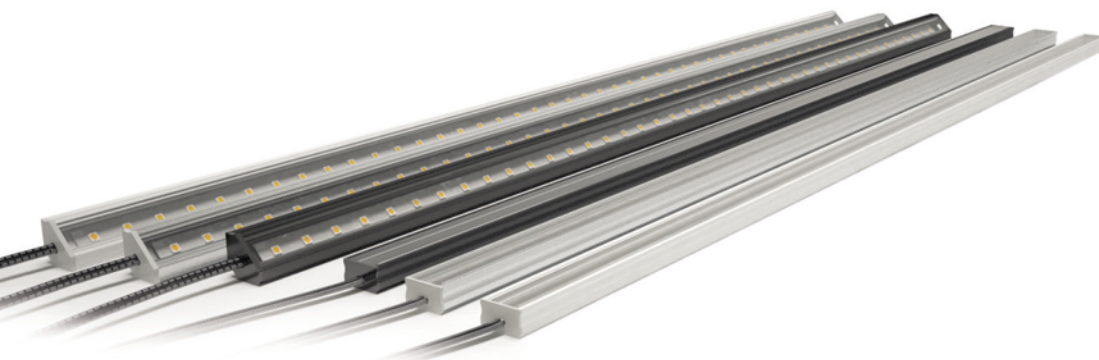

MADE IN ITALY





NOVA INDOOR 12 W/m or 25 W/m

IP40  CE

LED COLOR

White (cool, warm, neutral) / Red / Green / Blue
+ extra color Orange / Lime / Royal Blue

FINISHING

Black / Silver / White

POWER

12 W/m or
25 W/m

NOVA indoor is a thin LED bar for indoor lighting. Its small size allows to hide NOVA in many places to realize direct and indirect illumination. NOVA is the perfect solution for cove lighting and under cabinet lighting. The high light output allows to use NOVA for functional and for decorative lighting. It works at 24V DC and is available in many color temperatures, from 2200K up to 4000K, with minimum CRI 80.

NOVA allows to choose from many colors besides white: red, orange, green blue, lime and royal blue. It comes in many lengths: from 30cm up to 2m and it is possible to fix it with clips on the ceiling or hung it with steel threads. It is possible to change brightness with 1-10V or with DMX depending on the external power supply.

TECHNICAL SPECIFICATION

REFERRING STANDARDS	IEC 60598-1 / IEC 60598-2-5 / IEC 62471
NOMINAL CURRENT TO THE LEDS	60 mA - 100 mA
POWER AT SOURCE	12 W/m - 25 W/m
NOMINAL INPUT VOLTAGE	24 V dc
LIGHT INTENSITY REGULATION	1-10 V / DMX (External power supply)
BEAM ANGLES	symmetric wide
MOUNTING POSITIONS	Any
INITIAL LUMEN OUTPUT @ 4000 K	> 3500 lm/m
COLORED LIGHT	Red, Orange, Green, Lime, Blue, Royal blue
COLOR TEMPERATURE (*)	2200 K / 3000 K / 4000 K
LM OUTPUT LIFETIME	> 50000 h
OPERATING TEMPERATURE	-30°C / +50°C
IP RATING	IP40
WEIGHT	250 g/m
STANDARD LENGTH OF THE WIRE	1,5 m
LENGTHS	from 0,3 m (12") up to 2 m (78,7")


(*) Other color temperatures are available on request

TECHNICAL FEATURES


- High light output
- Metal parts in anodized aluminum alloy with black, silver or white finish
- High-brilliant LED light of latest generation technology
- Transparent or opal cover
- Transparent clips for indoor versions
- Thermal management with passive cooling
- Trasparent output cable
- Many lengths available

DIMENSIONS

mm (inch)

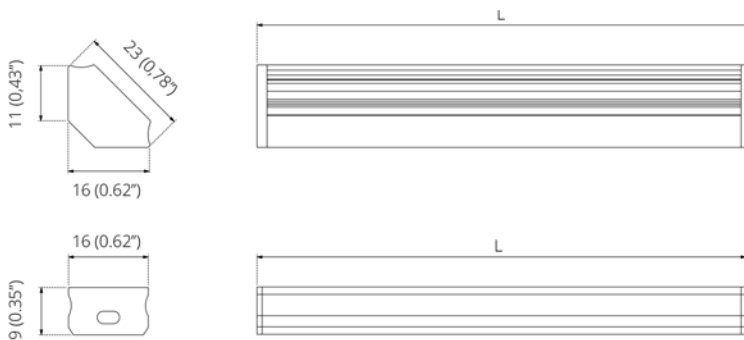

PHOTOMETRIC DATA

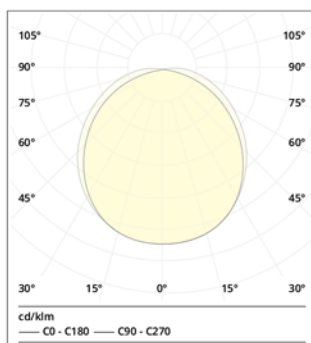

120°

color LED available



via Giuseppe Parini, 1
23845 Costa Masnaga (LC) Italy
Tel +39 0314121731
Fax +39 0314131783

info@spacecannonsne.it
spacecannonsne.it

